




Including ridge profiles and end caps!

JOINING PROFILES


And Multi-Wall Accessories

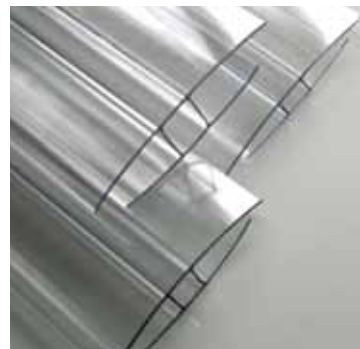

U-SHAPED POLYCARBONATE PROFILES

The U-shaped profile is used to close the cut side of MACROLUX® polycarbonate sheets. They are not a substitute for the application of aluminium foil, but they protect the foil from water leaching.


Cod.	Thickness			
	6mm M633	10mm M634	16mm M635	20mm M640
a	.748" (19mm)	.945" (24mm)	1.18" (30mm)	1.18" (30mm)
b	.984" (25mm)	1.14" (29mm)	1.34" (34mm)	1.38" (35mm)
c	.335" (8,5mm)	.492" (12,5mm)	.728" (18,5mm)	.886" (22,5mm)
d	.256" (6,5mm)	.413" (10,5mm)	.649" (16,5mm)	.807" (20,5mm)
Availability	•	•	•	*
Standard packing nr.	100	50	50	50
Length	12' (2100mm)	12' (2100mm)	12' (2100mm)	12' (2100mm)

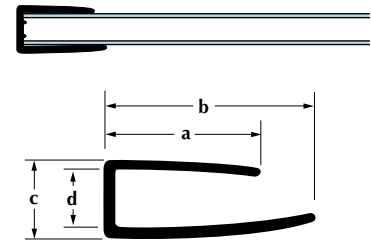

H-SHAPED POLYCARBONATE PROFILES

H-shaped polycarbonate profiles are specifically made to coordinate with various sheet thicknesses and have UV protection on the external side. They are used to join two MACROLUX® sheets. They should not be used as a weight-supporting structure, and are not guaranteed as watertight in a covering. They must be considered solely as a means for joining sheets.


Cod.	Thickness		
	6mm M430	8 - 10mm M431	16mm M432
a	2.28" (58mm)	2.44" (62mm)	2.83" (72mm)
b	2.83" (72mm)	2.98" (75,6mm)	3.31" (84mm)
c	.374" (9,5mm)	.531" (13,5mm)	.787" (20mm)
d	.276" (7mm)	.413" (10,5mm)	.670" (17mm)
e	472" (12mm)	.453" (11,5mm)	.610" (15,5mm)
Availability	•	•	•
Standard packing nr.	20	20	10
Length	24' (6000mm)	24' (6000mm)	24' (6000mm)

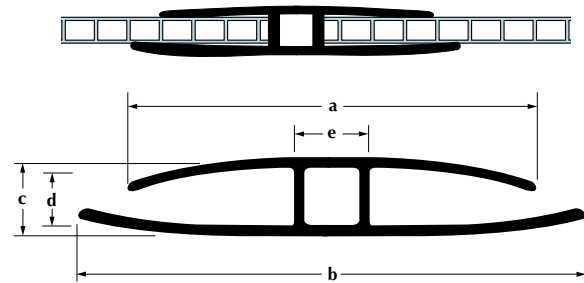

POLYCARBONATE SNAP PROFILE (SNAP)

The polycarbonate snap profile (which has UV protection on the external side) makes joining MACROLUX® multiwall sheets a snap. Simply apply pressure on the top profile. The polycarbonate profile is not structural and is not guaranteed as watertight.


Cod.		Thickness 6 - 10mm M439	
a	a*	2.28" (58mm)	2.24" (57mm)
b	b*	.728" (18,5mm)	.670" (17mm)
c	c*	.830" (21mm)	.906" (23mm)
d	d*	.138" (3,5mm)	.098" (2,5mm)
Availability		*	*
Standard packing nr.		10+10	10+10
Length		24' (6000mm)	24' (6000mm)

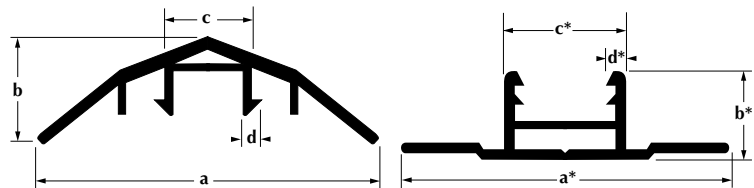

RIDGE PROFILES FOR SHEETS

The polycarbonate ridge profiles have a UV protection on the external side and they are used to join two MACROLUX® sheets at a ridge. The sheets must have the thickness detailed for each profile. They should not be used as weight-supporting structures but must be considered solely for sheet joining. The special shape of the profiles permits the formation of 90° corners.

Cod.	Thickness	
	6mm M448	8-10mm M449
a	5.75" (146mm)	5.83" (148mm)
b	.236" (6mm)	.394" (10mm)
Standard packing nr.	10	10
Length	24' (6000mm)	24' (6000mm)

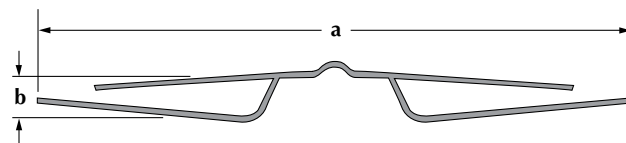

- Available
- * Available upon request

The data shown here is subject to change without notice at the discretion of CO-EX Corporation. It is the sole responsibility of the customer to confirm with their own architect, engineer or other professional consultants that the goods offered for sale by CO-EX Corporation meet the requirements and specifications of the particular project and use for which they are being purchased.

Call today for more information! (800) 888-5364